




**KINDLY  
MOTOR**

Low Noise Series  
PMDC Precious Metal  
Brush Motor

**KR330 Series**

Bearings            Sleeve  
Number of poles    3  
EMC Suppression   Internal ring varistor  
Standard Shaft (L) 25.5, 29.5

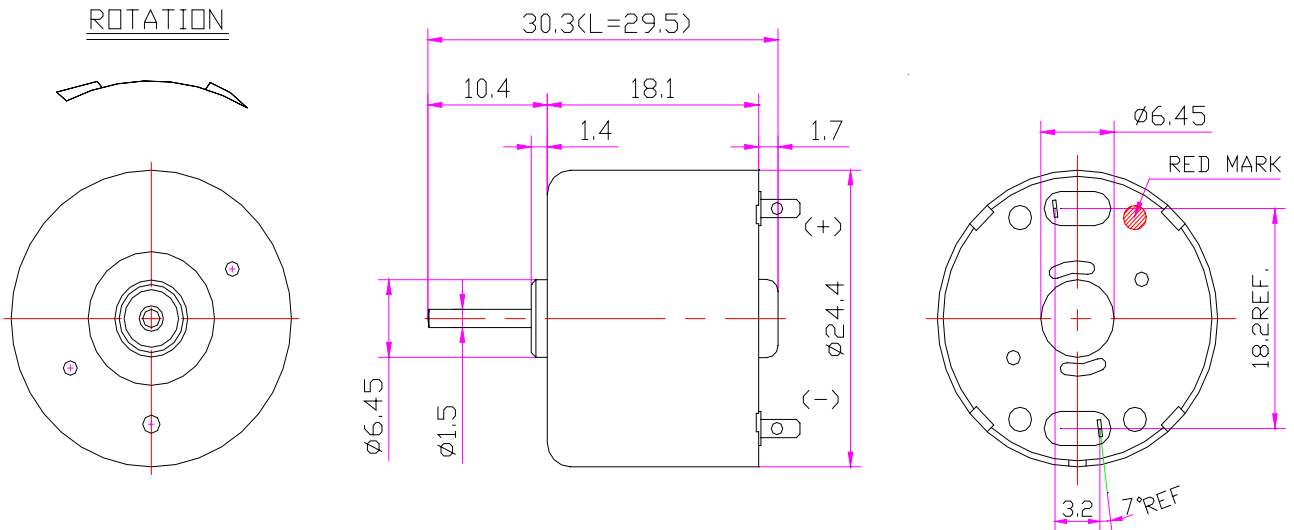

UNIT: MILLIMETERS

Model	Voltage		No Load		At Maximum Efficiency					Stall	
	Operating Voltage	Nominal (Constant)	Speed rpm	Current A.	Speed rpm	Current A.	Torque kg-cm	Output W	Eff. %	Torque g-cm	Current A.
KR330-13250	0.8-3.0	2.2	3200	0.022	2559	0.088	4.21	0.110	57.2	21.0	0.350
KR330-11350	1.0-3.2	1.5	2170	0.018	1607	0.051	2.07	0.034	44.3	8.0	0.147
KR330-11400	1.2-6.0	3.5	3100	0.020	2406	0.069	5.15	0.127	52.4	23.0	0.240
KR330-10500	1.2-7.2	4.5	3400	0.012	2731	0.049	4.53	0.127	57.5	23.0	0.240
KR330-09485	1.2-5.0	1.5	1630	0.012	1185	0.032	1.45	0.020	36.7	5.3	0.085
KR330-07800	1.5-12.0	1.5	800	0.006	537	0.012	0.92	0.010	27.6	2.8	0.026
KR330-07800	1.5-12.0	2.4	1400	0.008	971	0.018	1.38	0.010	31.6	4.5	0.041
KR330-07800	1.5-12.0	5.0	2800	0.012	2066	0.034	3.15	0.067	39.5	12.0	0.095
KR330-07800	1.5-12.0	12.0	5500	0.012	4371	0.046	6.57	8.290	52.8	32.0	0.180
General Test Tolerance			±15%								

**Typical Application:** Mini Fans, Gear Boxs, Air Fresheners, Solar Cell Products and More...

**Kindly Industrial Co., Ltd.**