



**KINDLY
MOTOR**

PMDC Carbon Brush Motor

**KFE130/ KS130
Series**

Bearings Sleeve

Number of poles 3




EMC Suppression Internal Disk Varistor (optional)

Standard Shaft (L) 35, 38, 42, 45






DIRECTION OF ROTATION

KFE130

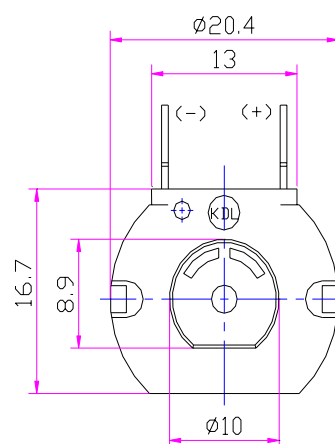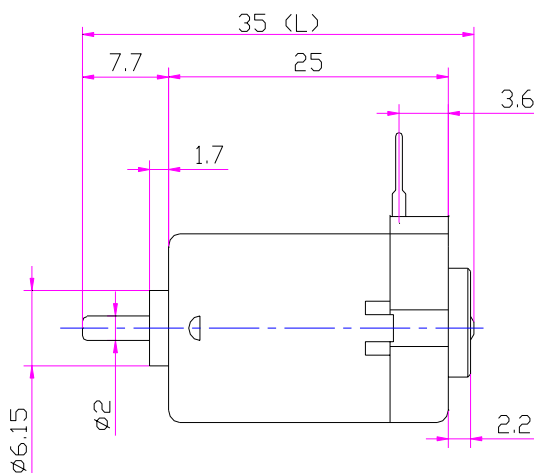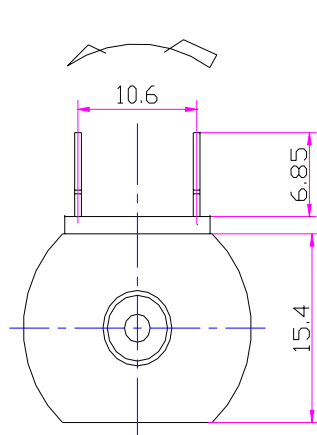

DIRECTION OF ROTATION

KS130

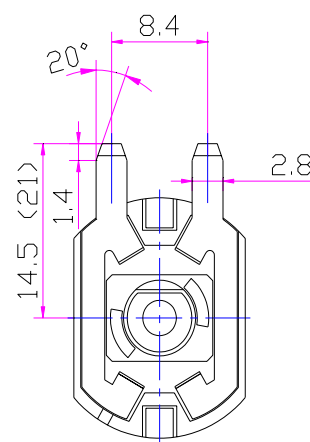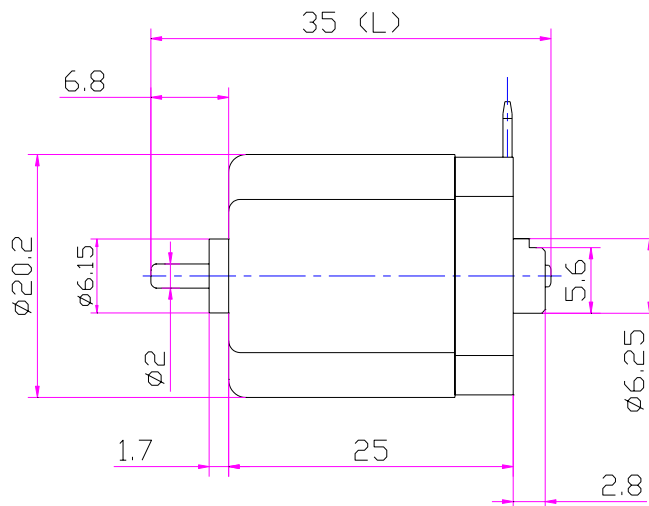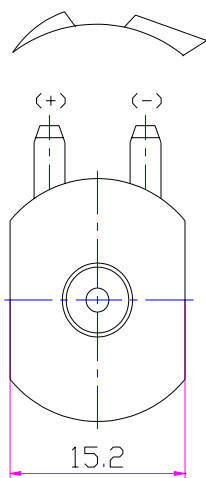

UNIT: mm.

Model	Voltage		No Load		At Maximum Efficiency					Stall	
	Operating Voltage	Nominal (Constant)	Speed rpm	Current A.	Speed rpm	Current A.	Torque g-cm	Output W	Eff. %	Torque g-cm	Current A.
KFE130S-10240	7.5-14.5	9.0	10300	0.080	7825	0.253	12.0	0.96	42.3	50	0.8
KS130S-09370	7.5-14.5	10.0	7350	0.050	5513	0.15	10.0	0.57	37.7	40	0.45
KFE130S-09400	7.5-14.5	13.0	8500	0.050	6531	0.166	15.1	1.010	46.8	65	0.55
KFE130S-07750	9.0-28.0	24.0	8750	0.030	6746	0.101	17.2	1.190	49.0	75	0.34
General Test Tolerance			±15%								

Typical Application: Automotive Head Light Level Adjusters, Rearview Mirrors and More...

Kindly Industrial Co., Ltd.