




**KINDLY
MOTOR**


Low Noise Series
PMDC Precious Metal
Brush Motor

KR370 Series

Bearings Sleeve
Number of poles 3
EMC Suppression Internal ring varistor
Standard Shaft (L) 38, 42, 43, 45, 47, 52

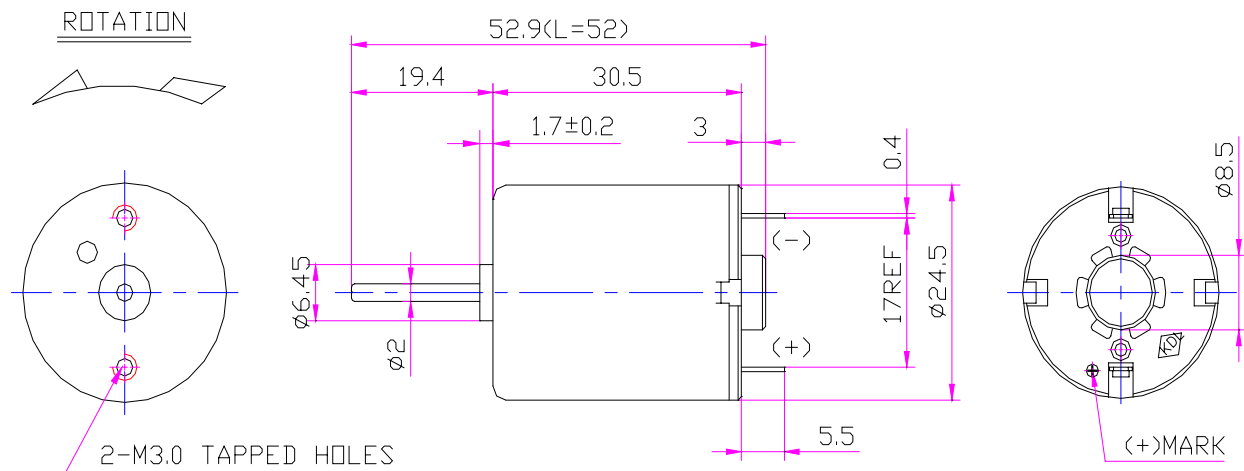

UNIT: MILLIMETERS



KR370 with plastic end cap. KR370HN with metal end cap also available.

Model	Voltage		No Load		At Maximum Efficiency					Stall	
	Operating Voltage	Nominal (Constant)	Speed rpm	Current A.	Speed rpm	Current A.	Torque kg-cm	Output W	Eff. %	Torque g-cm	Current A.
KR370-2590	1.2-3.6	3.0	5700	0.135	4688	0.626	22.2	1.07	56.8	125	2.09
KR370-14400	4.5-12.0	12.0	5000	0.035	4176	0.177	29.7	1.27	59.6	180	0.90
KR370-14400	4.5-12.0	6.0	2470	0.025	2007	0.108	17.8	0.37	56.4	95	0.47
KR370-12560	6.0-13.5	12.0	3600	0.018	3005	0.091	20.6	0.64	58.3	125	0.46
KR370-11630	6.0-15.0	13.5	3600	0.022	2894	0.090	23.1	0.69	56.4	118	0.37
KR370-10750	6.0-24.0	13.0	2800	0.013	2284	0.058	18.4	0.43	57.7	100	0.26
KR370-10750	6.0-24.0	10.0	2350	0.015	1835	0.053	14.9	0.28	52.6	68	0.19
KR370-08780	6.0-28.0	12.0	2500	0.010	1994	0.039	13.2	0.26	57.0	65	0.16
KR370-08780	6.0-28.0	24.0	5100	0.015	4180	0.068	24.3	1.04	63.8	135	0.31
KR370-08900	6.0-30.0	24.0	4500	0.015	3628	0.062	22.3	0.83	55.3	115	0.26
General Test Tolerance			±15%								

Typical Application: Automotive Air Conditioning Damper Actuators, Blood Pressure Meters, Aquarium Air Pumps and More...

Kindly Industrial Co., Ltd.